(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization International Bureau



(43) International Publication Date 21 October 2004 (21.10.2004)

PCT

(10) International Publication Number WO 2004/091222 A1

(51) International Patent Classification7:

H04N 7/32

(21) International Application Number:

PCT/KR2004/000821

(22) International Filing Date: 8 April 2004 (08.04.2004)

, ,

(25) Filing Language:

Korean

(26) Publication Language:

English

(30) Priority Data: 10-2003-0022784 10 April 2003 (10.04.2003) KR


- (71) Applicant (for all designated States except US): SK TELECOM CO., LTD. [KR/KR]; 99, Seorin-dong, Jongro-gu, Seoul 110-110 (KR).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): HWANG, Inseong [KR/KR]; 10-807 Hyundai Apt., 1346, Seocho-dong, Seocho-gu, Seoul 137-070 (KR). KIM, Chulwoo [KR/KR];

5-908, Jangmi APT., 7 (5/3) Sincheon-dong, Songpa-gu, Seoul 138-240 (KR). HONG, Mincheol [KR/KR]; 210-1301, Hyundai-2cha Apt., Dohwa 2-dong, Mapo-gu, Seoul 121-773 (KR). IN, Kyoungseok [KR/KR]; 101, 81-2 Jeongja-dong, Bundang-gu, Seongnam-si, Gyeonggi-do 463-010 (KR).

- (74) Agents: LEE, Chulhee et al.; 14F, Hyundai Marine & Fire Insurance Bldg., 646 Yeoksam-dong, Gangnam-gu, Seoul 135-080 (KR).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

[Continued on next page]

(54) Title: METHOD AND APPARATUS FOR DETERMINING SEARCH RANGE FOR ADAPTIVE MOTION VECTOR FOR USE IN VIDEO ENCODER

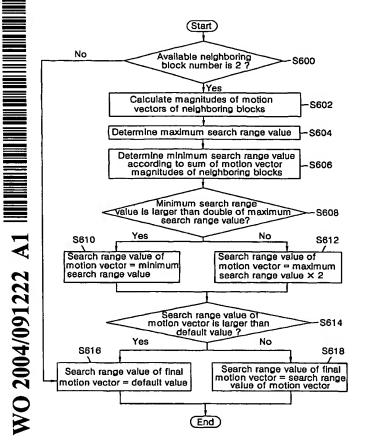

(57) Abstract: The video encoder in accordance with the present invention divides input image signal into macro blocks, estimates motion vectors of each macro block and finally encodes the input image signal. The encoder determines the number of macro blocks adjacent to a current macro block. If the number of adjacent macro blocks is equal to or more than two, the encoder calculates a motion vector of the adjacent macro blocks and selects a macro block that has the largest motion vector. Then it defines a least search area that the current adaptive motion vector can have, and compares the least search area with the motion vector of the largest adjacent macro block, and finally determines the largest value as the search area of the adaptive motion vector. Next, the encoder compares the search area of the adaptive motion vector with the search area of the user-defined motion adaptive vector to thereby determine the least value as the search area of the final adaptive motion vector.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

- with international search report